



DM111

ADSL2+ Ethernet Modem

Cost Effective High Speed Internet Connection

- *Help is there when you need it! NETGEAR provides 24x7 technical support* in English, with selected local language support during office hours.*

● Broad Standards Compliance


Supports a full range of ADSL standards, including ADSL2+, enabling service providers to attract more customers through greater reach and higher performance. G.Lite, ADSL, ADSL2, and ADSL2+ support ensures compatibility with most DSL networks. An ideal solution for residential or small business CPE deployments.

Easy to Install and Support ●

NETGEAR's reputation for easy installation and configuration helps lower support costs. Embedded PPPoE and PPPoA clients eliminate the need for PC-based software and get users up and running. Web-based user interface, with your choice of preloaded or custom settings, offers an effortless installation process. Multiple provisioning capabilities, such as DHCP spoofing mode, provide maximum flexibility in configuration automation. The auto-sensing, Auto Uplink™ 10/100 LAN port eliminates the need for crossover cables.

High Performance ●

Up to 24 Mbps downstream and 1.5 Mbps upstream throughput enables service providers to deliver true broadband experience. 10/100 Ethernet provides high-speed LAN performance.

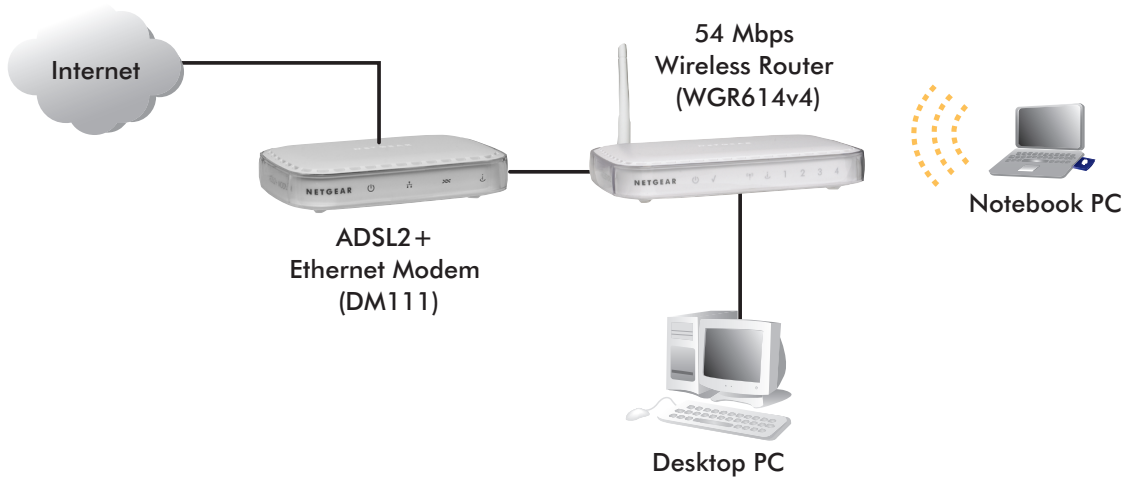

• Standards Support

- ITU 992.1 (G.dmt) Annex A, B
- ITU 992.2 (G.lite)
- ITU 992.3 ADSL2 (G.dmt.bis)
- ITU 992.5 ADSL2+
- ANSI T1.413 Issue 2
- Dying gasp – DSLAM notification on power loss
- IEEE 802.1d, 802.3, 802.3u – Ethernet
- USB 1.1 (optional)

• ATM Protocols

- ATM Forum UNI 3.1/4.0 PVC with SAR and AAL5 support
- OAM F4/F5
- Supports single PVC using factory preset value or via configuration file.

• Bridging

- RFC 2684 (formerly 1483) Bridged Ethernet over ATM PVCs – Bridged Mode
- IEEE 802.1D Transparent bridging – Ethernet to ADSL self learning
- Supports up to 128 MAC learning addresses
- TR-068 I-202 Half-Bridge mode – DHCP spoofing

• Encapsulation

- PPPoA client
- PPPoE client
- User name and password to 63 characters

• PPPoE Modem Additions

- RFC 2516 PPPoE
- DHCP server, DNS relay
- PPPoE Relay/Bridging

Package Contents

- DM111 ADSL2+ Ethernet modem
- Power adapter*
- Category 5 Ethernet cable
- RJ-11 phone cable (A-tick certified)
- Localized microfilter (optional)
- Resource CD

* Power Adapter: Plug is localized to country of sale in North America, Australia, Europe, United Kingdom, Japan

Product Specifications

• Physical Interfaces

- **LAN port:** One 10/100 Mbps auto-sensing Auto-MDI-X, RJ-45 port (one Cat 5 UTP cable included)
- **ADSL port:** RJ-11 port
- USB 1.1 B connector (optional)

• LEDs

- **Power:** Off, Solid Green (on and normal), Flashing Green (auto provision mode), Red (self test in progress, or self test failure)
- **LAN:** Off (no device connected), Solid Green (device connected)
- **ADSL:** Off (no link detected), Solid Green (synchronized with DSLAM), Blinking Green (synchronizing with DSLAM)
- **Internet:** Off (Modem power off, or in bridged mode, or no ADSL connection), Solid Green
- **USB (optional):** Off (no device connected), On (device connected).

• Hardware Specifications

- **Memory:** 2 MB Flash, 8 MB DRAM
- **ADSL chipset:** BCM6338
- **Power Switch:** Supplied as standard but can be removed as an option
- **Power requirements:** 12V DC, 1.0A; Plug is localized to country of sale, RoHS compliant
- **Dimensions:** H: 3.0 cm, W: 14.1 cm, D: 9.3 cm
- **Weight:** 190 g (0.67 lb)

• Environmental Specifications:

- **Operating temperature:** 0° to 40°C (32 to 104°F)
- **Non-operating:** -20° C to 70° C
- **Operating humidity:** 10-90% relative humidity, noncondensing
- **Non-operating humidity:** 5-95% relative humidity, noncondensing

Regulatory Compliance (as appropriate)

- FCC Part 15
- FCC Part 68
- CE (Europe)
- RoHS compliant
- A-Tick (Australia)
- C-Tick (Australia)

• Maintenance

- Save/Restore Configuration, Restore Defaults, Upgrades via Web Browser, Display Statistics, Logging

• Warranty

- NETGEAR 2-year warranty

NETGEAR Related Products

- RangeMax™ 240 Wireless Router WPNT834
- RangeMax™ Wireless Router WPN824
- 108 Mbps Wireless Firewall Router WGT624
- Super G™ Wireless Router – Security Edition WGT624SC
- 54 Mbps Wireless Router WGR614
- RangeMax™ Wireless USB 2.0 Adapter WPN111
- RangeMax™ Wireless PCI Adapter WPN311
- RangeMax™ Wireless PC Card WPN511
- RangeMax™ 240 Wireless Notebook Adapter WPNT511
- 108 Mbps Wireless PC Card WG511T
- 108 Mbps Wireless USB 2.0 Adapter WG111T
- 54 Mbps Wireless PC Card 32-bit CardBus WG511
- 108 Mbps Wireless PCI Adapter WG311T
- 54 Mbps Wireless USB 2.0 Adapter WG111
- 54 Mbps Wireless USB 2.0 Adapter WG121
- Gigabit PCI Adapter GA311
- Gigabit PC Card GA511
- 10/100 Low Profile PCI Network Interface Card FA311
- 10/100 32-bit CardBus PCCard Mobile FA511
- 85 Mbps Wall-Plugged Ethernet Switch XE104
- Wall-Plugged Ethernet Bridge XE102

NETGEAR®

4500 Great America Parkway
Santa Clara, CA 95054 USA
Phone: 1-888-NETGEAR
E-mail: info@NETGEAR.com
www.NETGEAR.com

©2006 NETGEAR, Inc. NETGEAR, the NETGEAR logo, Connect with Innovation, Everybody's connecting, the Gear Guy logo, IntelliFi, ProSafe, RangeMax and Smart Wizard are trademarks or registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. All rights reserved.

* Free basic installation support provided for 90 days from date of purchase. Advanced product features and configurations are not included in free basic installation support; optional premium support available.